

Fusor[®] 108B/109B Metal Bonding Adhesive (Medium)

Technical Data Sheet

Fusor[®] 108B/109B adhesive is a two-component, acrylic-based metal bonding adhesive offering faster cure time than typical panel bonding adhesives. Fusor 108B/109B adhesive can be used for panel bonding, weld bonding and rivet bonding of properly prepared quarter panels, rear body panels, roof panels, door skins, van side panels, and outer truck bed panels.

Features and Benefits:

Snap Cure – provides fast room temperature cure, resulting in reduced cycle times.

Versatile – bonds a variety of metal, including bare metal, steel and aluminum; no welding required; can be riveted and resistance welded.

Environmentally Resistant – acrylic chemistry provides excellent corrosion protection over epoxy adhesives.

Application:

Prepare – Follow the vehicle manufacturer's guidelines regarding the fastening of the replacement panel (welding, mechanical fasteners, or bond only).

Remove existing adhesive, e-coating, corrosion protection or galvanized coating from metal flange surfaces to which adhesive will be applied. Grind the surface of all mating flanges (not greater than 1 inch [25.4 mm]) using an 80-grit disk or finer.

If metal has a pewter appearance, then not all of the galvanized coating has been removed. The metal should be shiny in appearance. If sectioning, the seam will need a 10° bevel for a smooth transition into the existing panel (see Figure 1).

Pre-fit the new panel to ensure proper alignment and plan the mechanical fastening (STRSW welds or rivets) and clamping locations for the final installation. If pull rivets or solid rivets are being used, then the holes should be drilled at this time. Wipe bonding surface with solvent (acetone, heptanes, isopropyl alcohol, MEK, etc.), leaving no residue.

Apply – Load the cartridge into the dispensing gun and remove the end caps. Level the plungers by expelling a small amount of adhesive to ensure that adhesive is coming out of both sides of the cartridge. Attach mixing tip and dispense a small amount of adhesive to verify the material is evenly mixed and the color is consistent.

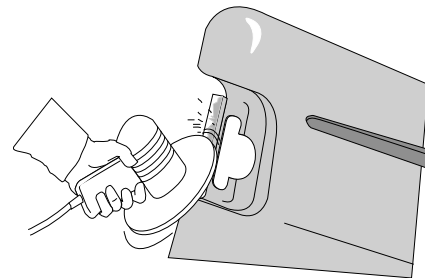


Figure 1. If Sectioning, 10° Bevel Required

Typical Properties*

Appearance	Green Paste
Base Chemistry	Acrylic
Work Time	40 minutes @ 70°F (21°C)
Clamp Time	2 hours @ 70°F (21°C)
Cure Time	4 hours @ 70°F (21°C)

*Data is typical and not to be used for specification purposes.



ENGINEERING YOUR SUCCESS.

Apply a 3/8 to 1/2 inch (9.5 to 12.7 mm) bead of adhesive to the prepared mating surfaces (see Figure 2).

Secure the panel using clamps. Mating surfaces must be held in contact during the curing process. The glass beads in the adhesive will prevent over clamping. Apply screws or rivets in hard-to-clamp areas. After the panel has been positioned, do not pull it away from the vehicle. If repositioning is necessary, slide the panels against one another. This maintains contact between the two surfaces.

Note: Various applications, cleaners/solvents and coatings may not be compatible with this product and should be tested by the user before proceeding with intended repair procedure.

Finish – Weld the panel (STRSW) or install the appropriate mechanical fasteners (rivets) in their respective locations. Once fastened, remove any remaining clamps or temporary fasteners. If a bond-only application, the clamps/fasteners may be removed after 2 hours at 70°F (21°C).

Adhesive squeeze out should be removed and surface wiped clean with a solvent.

Cure requires 4 hours at room temperature (70°F [21°C]).

Shelf Life/Storage

Shelf life is 18 months from date of manufacture when stored at 75°F (24°C) in original, unopened container.

Cautionary Information:

Before using this or any Parker LORD product, refer to the Safety Data Sheet (SDS) and label for safe use and handling instructions.

For industrial/commercial use only. Must be applied by trained personnel only. Not to be used in household applications. Not for consumer use.

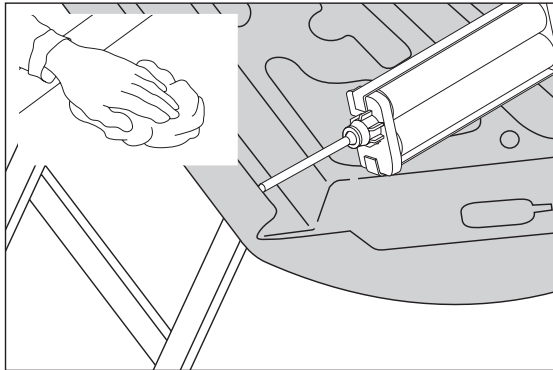


Figure 2. Apply Adhesive

Bond Performance****Lap Shear @ Room Temperature (ASTM D 1002 & ASTM D 5868)**

Substrates	Ground AL	Ground CRS	Ground HDG	Ground EGS	E-Coat
Results	2029 psi (14.0 MPa)	2067 psi (14.3 MPa)	1798 psi (12.4 MPa)	1864 psi (12.9 MPa)	1955 psi (13.5 MPa)

Lap Shear @ 176°F (80°C) (ASTM D 1002 & ASTM D 5868)

Substrates	Ground AL	Ground CRS	Ground HDG	Ground EGS	E-Coat
Results	876 psi (6.04 MPa)	902 psi (6.22 MPa)	896 psi (6.18 MPa)	767 psi (5.29 MPa)	675 psi (4.65 MPa)

Lap Shear @ -40°F (-40°C) (ASTM D 1002 & ASTM D 5868)

Substrates	Ground AL	Ground CRS	Ground HDG	Ground EGS	E-Coat
Results	2533 psi (17.5 MPa)	3360 psi (23.2 MPa)	2321 psi (16.0 MPa)	2211 psi (15.2 MPa)	2390 psi (16.5 MPa)

Lap Shear after 500 hours Salt Spray (ASTM B 117)

Substrates	Ground AL	Ground CRS	Ground HDG	Ground EGS	E-Coat
Results	2108 psi (14.5 MPa)	1361 psi (9.4 MPa)	1129 psi (7.8 MPa)	1361 psi (9.4 MPa)	2097 psi (14.5 MPa)

T-Peel @ Room Temperature (ASTM 1876 modified to 5"/minute)

Substrates	Ground AL	Ground CRS	Ground HDG	Ground EGS
Results	31.4 pli (5.50 N/mm)	25.5 pli (4.47 N/mm)	35.1 pli (6.15 N/mm)	35.4 pli (6.20 N/mm)

T-Peel @ 176°F (80°C) (ASTM 1876 modified to 5"/minute)

Substrates	Ground AL	Ground CRS	Ground HDG	Ground EGS
Results	32 pli (5.61 N/mm)	29.4 pli (5.15 N/mm)	30.8 pli (5.40 N/mm)	29.2 pli (5.12 N/mm)

T-Peel @ -40°F (-40°C) (ASTM 1876 modified to 5"/minute)

Substrates	Ground AL	Ground CRS	Ground HDG	Ground EGS
Results	23.4 pli (4.10 N/mm)	57.3 pli (10.04 N/mm)	50.4 pli (8.83 N/mm)	53.2 pli (9.32 N/mm)

Substrate

Substrate	Surface Treatment
Aluminum (AL) 6061T6, 0.032" thick (Lap Shear)	60-grit grind
Aluminum (AL) 4111T4, 0.032" thick (T-Peel)	60-grit grind
Cold Rolled Steel 1010 (CRS), 0.032" thick	60-grit grind
Hot Dipped Galvanized Steel (HDG), 0.032" thick	60-grit grind
Electro Galvanized Steel (EGS), 0.032" thick	60-grit grind
E-coat Primed Steel (ECPS), 0.032" thick	Scuffed

Bonded Parameters	Bond Area	Film Thickness	Cure	Mix Ratio
Metal Lap Shears (ASTM D1002)	1.0"x0.5"	0.010"	24 hr @ RT	10:1 by Volume

**Data is typical and not to be used for specification purposes. Fusor 108B/109B adhesive demonstrates cohesive failure on most metal substrates.

Fusor® Repair Products Lifetime Guarantee*

LORD Assembly & Protection Solutions Division of Parker-Hannifin Corporation ("Parker LORD") guarantees to the user that Fusor® Repair Products (adhesives, primers, seam sealers and foams only), when used in strict accordance with Parker LORD application and use instructions, will provide a durable repair for the life of the vehicle per the product's technical data sheet. The user is solely responsible for determining the Fusor product and application method for the repair. Application and product guidance can be found on Fusor.com.

THIS EXPRESS WARRANTY IS MADE IN LIEU OF AND EXCLUDES ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, BY OPERATION OF LAW OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Parker LORD shall not be liable under any circumstance for any liability, loss, damage or expense directly or indirectly arising from the application and use of Fusor Products sold hereunder or from any other cause. Parker LORD shall not be liable under any circumstances for consequential, indirect or special damages. **PARKER LORD'S LIABILITY FOR BREACH OF WARRANTY HEREUNDER IS IN ALL INSTANCES LIMITED SOLELY AND EXCLUSIVELY TO THE REASONABLE COSTS OF REPAIR AND/OR REPLACEMENT OF THE BONDED COMPONENTS OF THE VEHICLE.**

This guarantee shall only apply to the above referenced Fusor products sold by Parker LORD on or after January 1, 2001.

Fusor Metal Bonding Adhesives shall only be used for the adhesive-only bonding (no welds or rivets) of metal to metal assemblies (steel or aluminum) in full or partial panel replacements of door skins, roof skins, quarter panels, rear body panels and other outer body sheet metal where approved by the vehicle manufacturer.

Fusor products shall not be used for adhesive-only bonding of any structural component unless specifically recommended by the vehicle manufacturer. Structural panels must be replaced in strict compliance with vehicle manufacturer guidelines. If in doubt as to what is a structural component or the proper installation method, contact the vehicle manufacturer. Further, any Fusor products used in marine composite repair, such as with personal water craft and the like, shall be limited to repairs above the water line.

If you have any questions or need to receive proper use instructions, contact the Parker LORD Customer Support Center at +1 800 234 Fusor (3876) or visit Fusor.com.

To comply with the requirements of the Fusor Repair Products Lifetime Guarantee, attach a copy of this completed page to the repair record, and retain with your files:

Vehicle Make/Model: _____

Vehicle Identification Number: _____

Fusor Product(s) Used for Repair: _____

Lot Number(s) on Cartridge(s) Used for Repair: _____

**This guarantee is void if product is used after the date printed on the cartridge label. Parker LORD Terms and Conditions of Sale shall apply to all sales of Fusor products.*



Continuing Automotive
Service Education
CERTIFIED TRAINING PROVIDER

Instructions contained in this document need to be followed to qualify for the LORD Fusor Lifetime Guarantee. Values stated in this technical data sheet represent typical values as not all tests are run on each lot of material produced. For formalized product specifications for specific product end uses, contact the Customer Support Center.

Information provided herein is based upon tests believed to be reliable. In as much as Parker LORD has no control over the manner in which others may use this information, it does not guarantee the results to be obtained. In addition, Parker LORD does not guarantee the performance of the product or the results obtained from the use of the product or this information where the product has been repackaged by any third party, including but not limited to any product end-user. Nor does the company make any express or implied warranty of merchantability or fitness for a particular purpose concerning the effects or results of such use.

WARNING — USER RESPONSIBILITY. FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

©2020 Parker Hannifin - All Rights Reserved

Information and specifications subject to change without notice and without liability therefor. Trademarks used herein are the property of their respective owners.

OD DS6204 01/21 Rev.2



Parker LORD
Engineered Materials Group

111 LORD Drive
Cary, NC 27511-7923
USA

phone +1 877 ASK LORD (275 5673)

www.lord.com